



MU 1-X/..., MU 1-CX/..., MU 1-XG/..., MU 1-MM/...

Unity Gain $\frac{1}{4} \lambda$ Mobile Antenna for the 450 MHz Band



DESCRIPTION

- Black-chromed stainless steel whip.
- MU 1-X/... cover a large frequency range from 370 – 470 MHz.
- (See Ordering Designations.)
- Stainless steel X-mount with M6-thread whip-fastening system.
- Simple mounting exclusively with access from the outside.
- Models available with X-mount (oblong), CX-mount (circular), XG-Combi mount (oblong with GPS) and MM-mount (magnetic).
- Choose between four connection possibilities:
 - X-mount, CX-mount, MM-mount: FME-connection (supplied without cable).
 - XP4-mount, CXP4-mount: Permanently attached 4 m cable terminated with FME-connector.
 - XG-Combi mount: FME-connection and GPS (supplied without cable).
 - XGP4-Combi mount: Permanently attached 4 m cable terminated with FME-connector for whip and 0.15 m RG 178 with MFME for GPS.
- Easily removable whip for car wash.
- GPS-antenna for fixed installations.
- Full hemispherical coverage.
- Built-in high-gain, low-noise amplifier.
- Right-Hand Circular Polarization (RHCP).
- 2.85 V – 5 V supply voltage (typical 3 V).

SPECIFICATION

Electrical	
Model	MU 1-X/..., MU 1-CX/..., MU 1-XG/..., MU 1-MM/...
Frequency	Models within 370 – 470 MHz
Antenna Type	Mobile whip antenna
Max. Input Power	100 W
Polarisation	Vertical
Impedance	50 Ω
VSWR	≤ 1.2:1 @ f. res.
Bandwidth	≥ 45 MHz @ VSWR < 1.5 ≥ 50 MHz @ VSWR < 2.0
Gain (EIA RS-329-1)	0 dB
Mechanical	
Materials	Whip: Stainless steel and black-chromed brass Mount: Black-chromed brass Weather- and shockproof plastics Stainless steel
Installation Torque	4 ± 1 Nm
Colour	Black
Historic Brand	Procom
Antenna Mount Type	Hole MountMagnetic Mount
Height	180 mm / 7.09 in.
Weight	X-version: Approx. 60 g XP4-version: Approx. 200 g CX-version: Approx. 60 g CXP4-version: Approx. 200 g XG-version: Approx. 80 g XGP4-version: Approx. 220 g MM-version: Approx. 290 g

ORDERING CODES


Model	Product No.	Frequency	Additional Information
MU 1-X/s	130000866	370 – 410 MHz	X-mount (oblong) with FME-system
MU 1-X/sl	130002284	380 – 430 MHz	X-mount (oblong) with FME-system
MU 1-X/l	130000858	406 – 440 MHz	X-mount (oblong) with FME-system
MU 1-X/h	130000862	430 – 470 MHz	X-mount (oblong) with FME-system
MU 1-CX/s	130000867	370 – 410 MHz	CX-mount (circular) with FME-system
MU 1-CX/sl	130002285	380 – 430 MHz	CX-mount (circular) with FME-system

MU 1-CX/l	130000861	406 – 440 MHz	CX-mount (circular) with FME-system
MU 1-CX/h	130000859	430 – 470 MHz	CX-mount (circular) with FME-system
MU 1-XG/s	132000200	370 – 410 MHz	XG-Combi mount (oblong) with FME-system and GPS
MU 1-XG/sl	130002286	380 – 430 MHz	XG-Combi mount (oblong) with FME-system and GPS
MU 1-XG/l	132000201	406 – 440 MHz	XG-Combi mount (oblong) with FME-system and GPS
MU 1-XG/h	132000202	430 – 470 MHz	XG-Combi mount (oblong) with FME-system and GPS
MU 1-XP4/s	130000869	370 – 410 MHz	XP4-mount (oblong) with 4 m cable and FME-connector
MU 1-XP4/sl	130002287	380 – 430 MHz	XP4-mount (oblong) with 4 m cable and FME-connector
MU 1-XP4/l	130000855	406 – 440 MHz	XP4-mount (oblong) with 4 m cable and FME-connector
MU 1-XP4/h	130000857	430 – 470 MHz	XP4-mount (oblong) with 4 m cable and FME-connector
MU 1-CXP4/s	130000868	370 – 410 MHz	CXP4-mount (circular) with 4 m cable and FME-connector
MU 1-CXP4/sl	130002288	380 – 430 MHz	CXP4-mount (circular) with 4 m cable and FME-connector
MU 1-CXP4/l	130000863	406 – 440 MHz	CXP4-mount (circular) with 4 m cable and FME-connector
MU 1-CXP4/h	130000853	430 – 470 MHz	CXP4-mount (circular) with 4 m cable and FME-connector
MU 1-XGP4/s	132000205	370 – 410 MHz	XGP4-Combi mount (oblong) with 4 m cable, FME-connector and GPS
MU 1-XGP4/sl	130002289	380 – 430 MHz	XGP4-Combi mount (oblong) with 4 m cable, FME-connector and GPS
MU 1-XGP4/l	132000206	406 – 440 MHz	XGP4-Combi mount (oblong) with 4 m cable, FME-connector and GPS
MU 1-MM/s	130000849	370 – 410 MHz	MM-mount (magnetic) with FME-system

MU 1-MM/sl	130002290	380 – 430 MHz	MM-mount (magnetic) with FME-system
MU 1-MM/l	130000850	406 – 440 MHz	MM-mount (magnetic) with FME-system
MU 1-MM/h	130000851	430 – 470 MHz	MM-mount (magnetic) with FME-system
MU 1-XGP4/h	132000207	430 – 470 MHz	XGP4-Combi mount (oblong)

ADDITIONAL INFORMATION

The whip is compatible with all below mounts

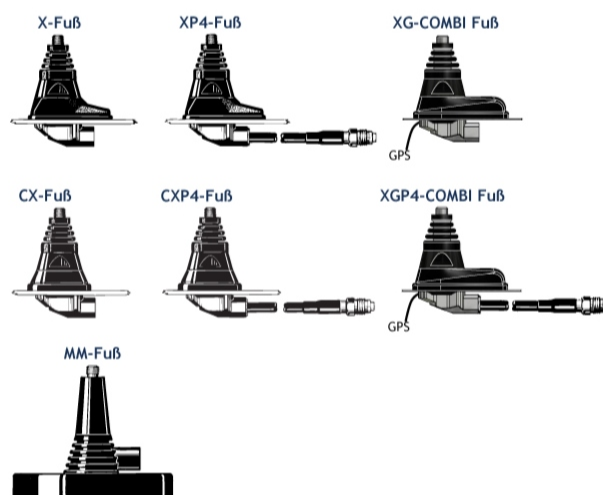

Installation and assembly Instructions

- Please refer to the data sheet of each individual mount to find the installation and assembly instructions.

TUNING/MODEL CONVERSION

- The antenna is delivered factory-tuned and requires no further tuning.
- To convert an MU 1-X/s model into an MU 1-X/l model, cut off 15 mm of the top end of the whip.
- To convert an MU 1-X/l model into an MU 1-X/h model, cut off 11 mm of the top end of the whip.

PLEASE NOTE

- For safety reasons: When using the MU 1-MM, car speed must not exceed 140 km/h.