



PRO-HDAR450-2SI

Ultra Compact 2-channel UHF/LTE 450 MHz Tx/Rx Combiner



DESCRIPTION

- An integrated single tray combining solution housing a 2-channel Tx hybrid combiner, duplex filter, active 2-channel Rx multicouplers and preselector.
- Minimal 19" rack space required – only 2 HU in a 19" rack.
- Built-in power supply suitable for 115/230 VAC.
- Compatible with digital 6.25 kHz channel spacing.
- Single Tx isolators fitted as standard.
- Please specify all Tx/Rx frequencies when ordering.
- Please Note:
Power cable is not included, must be ordered separately, see Accessories.

SPECIFICATION

Electrical	
Model	PRO-HDAR450-2SI
Frequency	L : 380 – 400 MHz H : 406 – 470 MHz
Max. Input Power	50 W (per channel)
Spacing Tx-Rx	≥ 5 MHz
Spacing Tx-Tx	≤ 2 MHz
Insertion Loss	≤ 5.4 dB
Impedance	50 Ω
Ant-Tx Isolation	> 40 dB @ 25 °C
Isolation Tx-Tx	> 70 dB @ 25 °C
Isolation Tx – Rx	> 85 dB for Tx – Tx spacing < 0.5 MHz > 65 dB for Tx – Tx spacing > 0.5 MHz
Isolation Rx-Rx	> 20 dB
VSWR	≤ 1.5:1
LNA Noise Figure	< 3.5 dB
Gain Rx	1 dB ±1 dB (factory set)
No. of channels	2
Environmental	
Storage temperature range	-30 °C to +60 °C
Mechanical	
Connection(s)	N(f)
Historic Brand	Amphenol Procom
Dimensions	19" x 2 HU 483 x 89.9 mm 19.02 x 3.54 in. – see drawing for depth of tray

Weight	Approx. 7.6 kg / 16.76 lb.
Power Supply	
Voltage	85 – 264 V AC
Frequency	47 – 63 Hz
AC current (typ.)	0.35 A / 115 V AC 0.25 A / 230 V AC

ORDERING CODES

Model	Product No.
-------	-------------

Ultra Compact 2-channel UHF/LTE 450 MHz Tx/Rx Combiner

PRO-HDAR450-2SI

ADDITIONAL INFORMATION

Ordering Designations

Contact for system-specific product No.

Use the guide below to make the name of the PRO-HDAR450-2SI you would like to buy. Remember to buy the Power Adaptor separately if needed.


Model	Duplex Filter Freq. Band	Pre-selector Rx Freq. Band	Duplex filter Bandwidth (BW) and Tx/Rx Spacing	Max. input power
PRO-HDAR450-2SI	Low : 340 – 400 MHz = L High : 406 – 470 MHz = H	380 – 440 MHz = L 430 – 470 MHz = H	2-5/7-2 * 2-7/9-2 2-9/13-2 2-13/16-2 *Max. Low BW: 2 MHz- Tx/Rx spacing: 5 to 7 MHz – Max. High BW: 2 MHz = 2-5/7-2	50 W per channel
Naming Example				
PRO-HDAR450-2SI	H	H	/2-5/7-2	/50W

Naming Example: PRO-HDAR450-2SI HH/2-5/7-2/50W


Accessories

Model	Product No.
Power Cable EU , with Ground	210002646
Power Cable UK , with Ground	210002647
Power Cable US , with Ground	210002648

Block Diagram

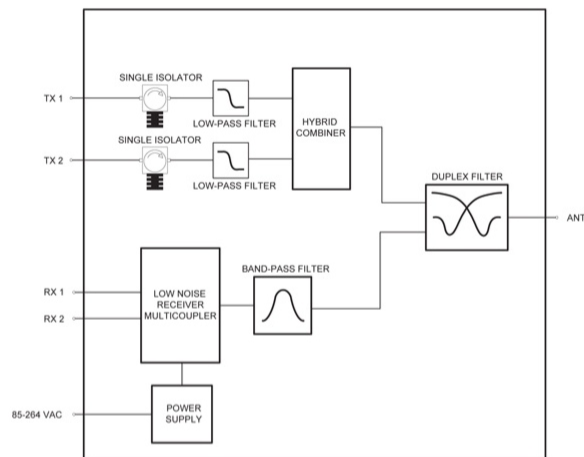

Mounting Details

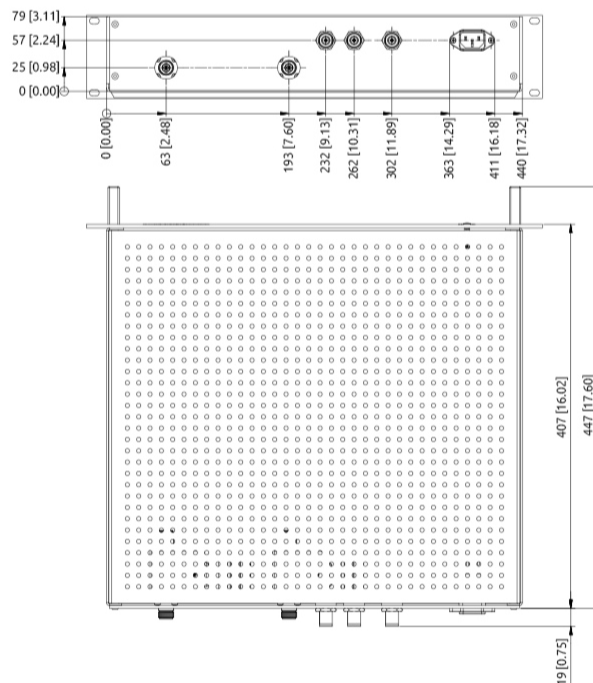

All dimensions are given in mm [in.]

EU and UK Declaration of Conformity

Hereby Amphenol Procom declare that the product type PRO-HDAR450-2SI is in compliance with EU Directive 2014/53/EU and the UK Radio Equipment Regulations 2017 (S.I. 2017 No. 1206).

The full text of the Declaration of Conformity is available at:

<https://s3.us-west-2.amazonaws.com/catsy.1080/Declaration-of-Conformity-PRO-HDAR450.pdf>



PROCOM A/S reserves the right to
amend specifications without prior notice



PROCOM A/S • Smedetofte 12
DK 3600 Frederikssund • Denmark

Page: 3 of 3
Generated : 2026-09-17
Version 1